


1. Pyroguard EW30 IMPACT (7mm).
2. Hardwood Or Non-Combustible Setting Block.
3. 10mm (W) x 2mm (T) Mann McGowan Interdens Glazing Seal.
4. 50mm Long x SWG16 Steel Pins Or 32mm Long No.6-8 Cupped Steel Screws At Maximum 150mm Centres (30° To Glass) & Nominally 50mm From Each Corner.
5. 23mm (W) x 15mm (H) Hardwood Glazing Bead (DP20075), Minimum Density 650 kg/m³.
6. 44mm (T) External & 46mm (T) Internal Softwood Or Hardwood Framing, Minimum Density 510 kg/m³.

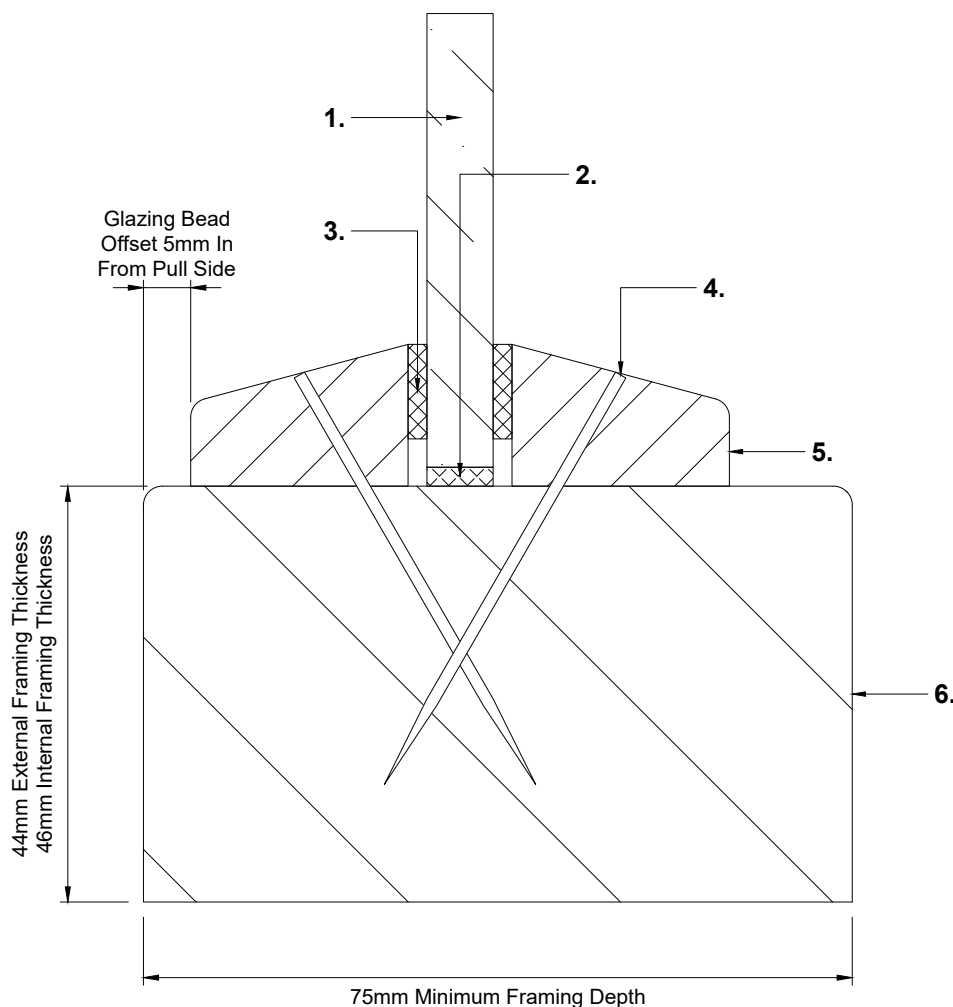

Quality Standard Of Glazed Aperture To Work Instruction - WI_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Approved Screen Types - Pyroguard EW30 IMPACT (7mm)

Screen Type	Glass Certificate	Material Specification For Glass	Bead Profile Drawing	Material Specification For Beading	Maximum Glass Width (mm)	Maximum Glass Height (mm)	Maximum Area (m²)	Glass Size Width 7mm Smaller & Height 7mm Smaller Than Internal Frame Perimeter
Fanlights (FD30/0)	CF257	MS_006	DP20075 Rev00	MS_007	3125 (W) @ 806 (H)	1008 (H) @ 2500 (W)	2.52	
Side Screens (FD30/0)	CF257	MS_006	DP20075 Rev00	MS_007	1070 (W) @ 2500 (H)	2675 (H) @ 1030 (W)	2.68	

Do Not Scale.

If In Doubt Ask!

Description: **Screen Glazing System - Pyroguard EW30 IMPACT (7mm) - FD30/0**

© Doorpac Ltd

Drawn By: O BOOY		Approved: Approved	Date: 24/08/2026	Cert / FoA Ref: CF257	Drawing No:	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: Pyroguard EW30 IMPACT (7mm)		Rev:	Fire Rating: FD30/0		DP25484	
Job No:	Tolerance:				Rev00	