


1. Pyrobel 16.
2. Non-Combustible Setting Block.
3. Neutral Silicone Capping.
4. 12mm (W) x 4mm (T) Sealmaster Black Glazing Tape.
5. 50mm Long x SWG16 Steel Pins At Maximum 150mm Centres Or 50mm Long No.6 - 8 Cupped Steel Screws At Maximum 250mm Centres (30° To Glass) & Nominally 50mm From Each Corner.
6. 25mm (W) x 27mm (H) Hardwood Glazing Bead (DP20495), Minimum Density 640 kg/m³.
7. 44mm (T) External & 46mm (T) Internal Hardwood Framing, Minimum Density 640 kg/m³.

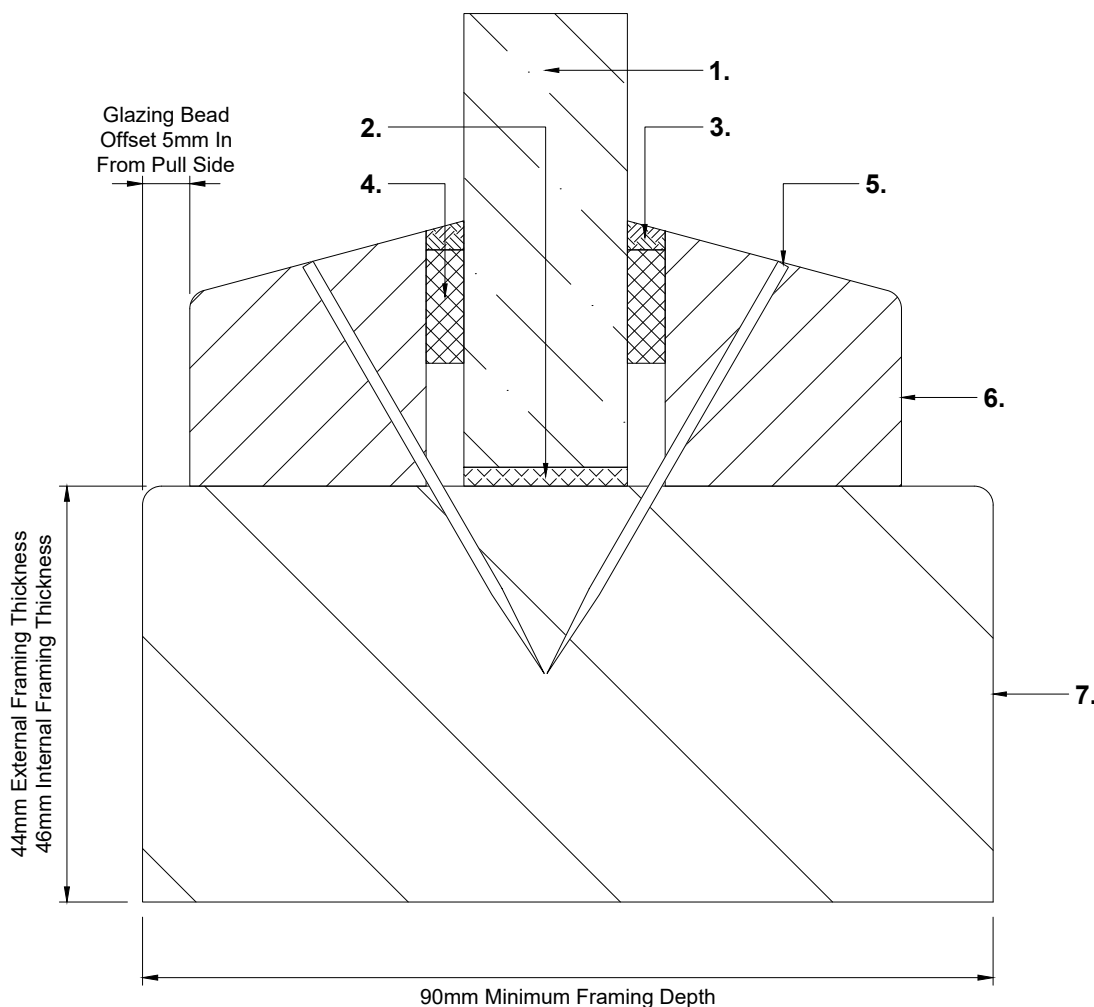

Quality Standard Of Glazed Aperture To Work Instruction - WI_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Approved Screen Types - Pyrobel 16

Screen Type	Glass Certificate	Material Specification For Glass	Bead Profile Drawing	Material Specification For Beading	Maximum Glass Width (mm)	Maximum Glass Height (mm)	Maximum Area (m²)	Glass Size Width 5mm Smaller & Height 7mm Smaller Than Internal Frame Perimeter
Fanlights & Side Screens (FD60/30)	CF377	MS_006	DP20495 Rev00	MS_007	1944 (W) @ 1944 (H)	2900 (H) @ 1400 (W)	3.78	

Do Not Scale.

If In Doubt Ask!

Description: **Screen Glazing System - Pyrobel 16 - FD60/30**

© Doorpac Ltd

Drawn By: O BOOY	Approved: Approved	Date: 24/08/2026	Cert / FoA Ref:	Drawing No:	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: Pyrobel 16	Rev:	Fire Rating: FD60/30	CF377	DP25487	
Job No:	Tolerance:			Rev00	