


1. Pyrobel 25.
2. Non-Combustible Setting Block.
3. Neutral Silicone Capping.
4. 15mm (W) x 4mm (T) Sealmaster Black Glazing Tape.
5. 50mm Long No.6 - 8 Cupped Steel Screws At Maximum 250mm Centres (30° To Glass) & Nominally 50mm From Each Corner.
6. 30mm (W) x 27mm (H) Hardwood Glazing Bead (DP22545), Minimum Density 640 kg/m³.
7. 44mm (T) External & 46mm (T) Internal Hardwood Framing, Minimum Density 640 kg/m³.

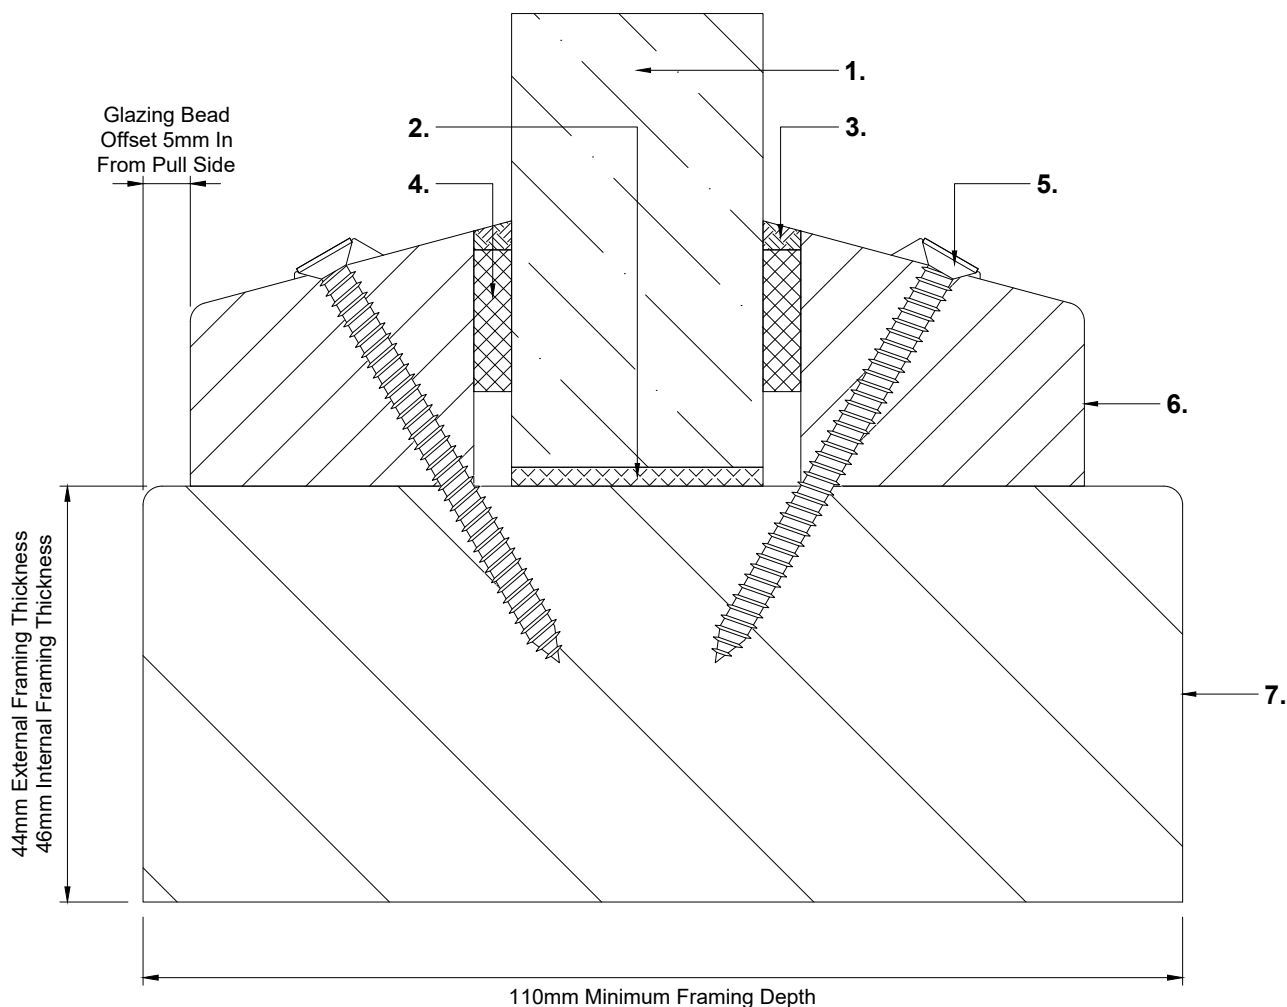

Quality Standard Of Glazed Aperture To Work Instruction - WI_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

Approved Screen Types - Pyrobel 25

Screen Type	Glass Certificate	Material Specification For Glass	Bead Profile Drawing	Material Specification For Beading	Maximum Glass Width (mm)	Maximum Glass Height (mm)	Maximum Area (m²)	Glass Size Width 5mm Smaller & Height 7mm Smaller Than Internal Frame Perimeter
Fanlights & Side Screens (FD60/60)	CF377	MS_006	DP22545 Rev00	MS_007	2283 (W) @ 2000 (H)	2874 (H) @ 1658 (W)	4.765	

Do Not Scale.

If In Doubt Ask!

Description: **Screen Glazing System - Pyrobel 25 - FD60/60**

© Doorpac Ltd

Drawn By: O BOOY	Approved: Approved	Date: 24/08/2026	Cert / FoA Ref:	Drawing No:	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: Pyrobel 25	Rev:	Fire Rating: FD60/60	CF377	DP25488	
Job No:	Tolerance:			Rev00	