


1. 6.4mm, 6.8mm, 8.8mm, 10.8mm, 12.8mm 14.8mm & 16.8mm Laminated/Acoustic Laminated Glass.
2. Hardwood Or Non-Combustible Setting Block.
3. 10mm (W) x 2mm (T) Double Sided Black Foam Glazing Tape.
4. 50mm Long x SWG16 Steel Pins At Maximum 150mm Centres (30° To Glass) & Nominally 50mm From Each Corner.
5. 23mm (W) x 15mm (H) Hardwood Glazing Bead (DP20075).
6. 44mm (T) External & 46mm (T) Internal Softwood Or Hardwood Framing.

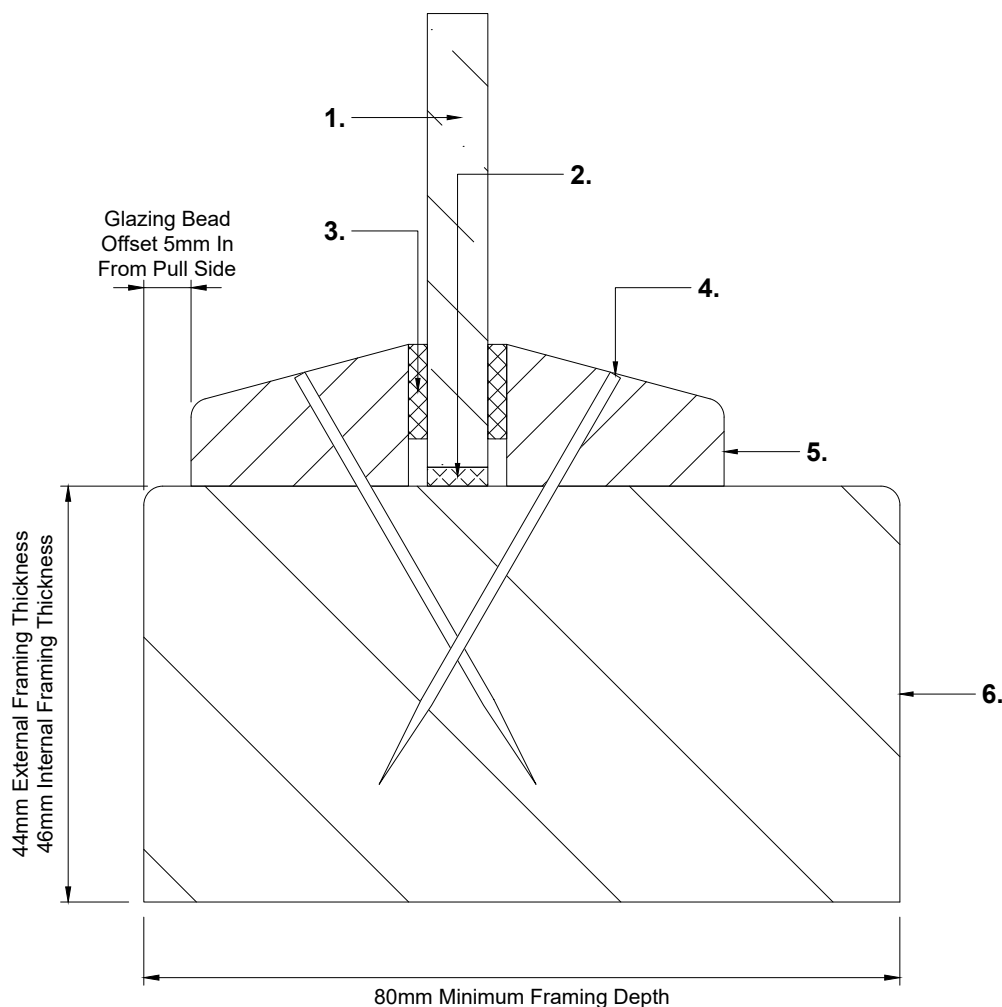

Quality Standard Of Glazed Aperture To Work Instruction - WI_21

Only Employees With A Signed Training Record For This Glazing System To Use This Glazing System

**Approved Screen Types - 6.4mm, 6.8mm, 8.8mm, 10.8mm, 12.8mm, 14.8mm & 16.8mm
Laminated/Acoustic Laminated Glass**

Screen Type	Material Specification For Glass	Bead Profile Drawing	Material Specification For Beading	Maximum Glass Width (mm)	Maximum Glass Height (mm)	Maximum Area (m²)	Glass Size Width 5mm Smaller & Height 7mm Smaller Than Internal Frame Perimeter
Fanlights & Side Screens (NFR)	MS_006	DP20075 Rev00	MS_007	N/A	N/A	N/A	

Do Not Scale.

If In Doubt Ask!

Description: **Screen Glazing System - 6.4mm, 6.8mm, 8.8mm, 10.8mm, 12.8mm, 14.8mm & 16.8mm Laminated/Acoustic Laminated Glass - NFR**

© Doorpac Ltd

Drawn By: O BOOY	Approved: Approved	Date: 24/08/2026	Cert / FoA Ref:	Drawing No:	 Unit 6, Ranskill Court, Sheffield, S9 5FZ
Size: As Above	Rev:	Fire Rating:	N/A	DP25496	
Job No:	Tolerance:	NFR		Rev00	