All Dimensions Are
In mm Unless Stated

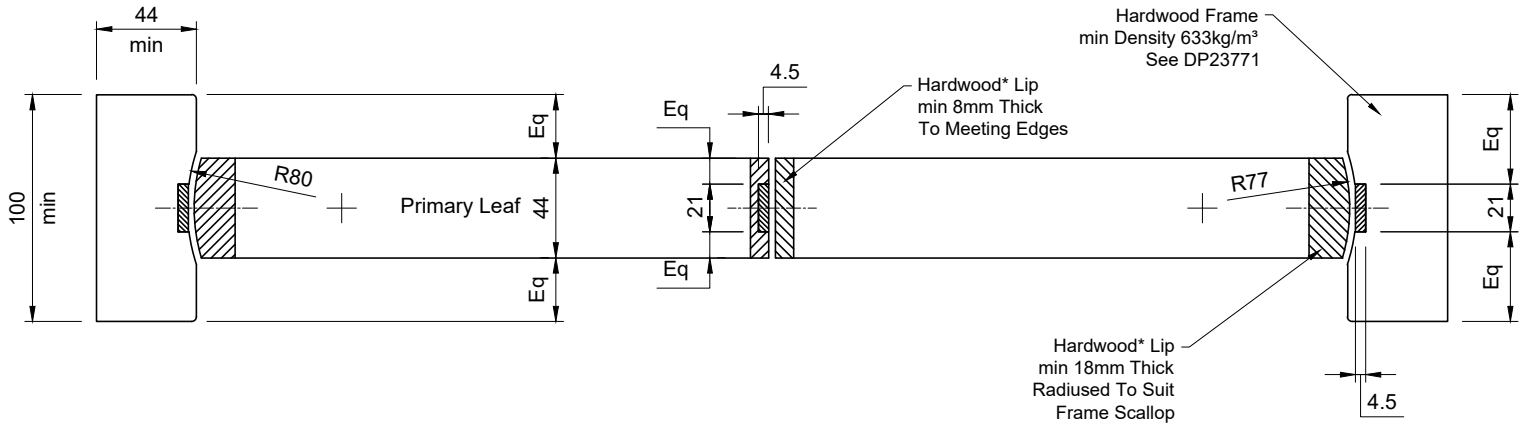


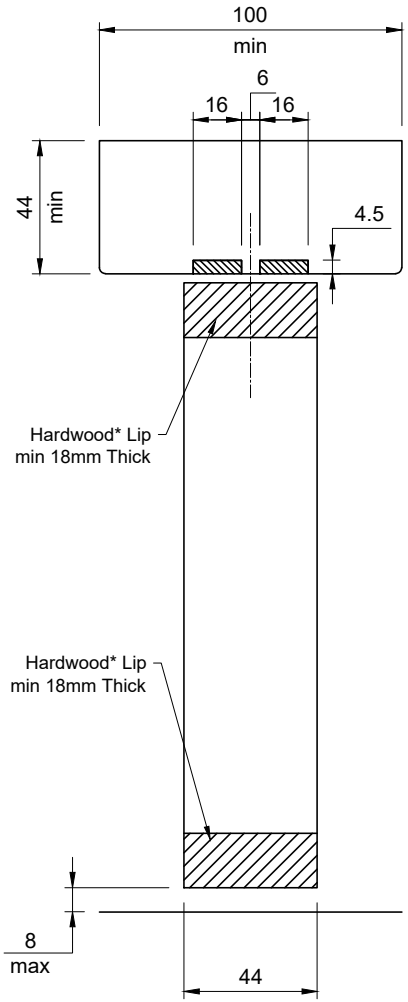


Do Not Scale.

If In Doubt Ask!

Notes:

Max Leaf Height: 2816mm @ 1116mm Wide

Max Leaf Width: 1147mm @ 2741mm High

Door Leaf Is To Be Positioned Centrally Within The Width Of The Frame

* - Hardwood Lippings - Min Density 640kg/m³ (Excluding Ash, Beech & Iroko)

Frame Material - Hardwood min Density 633kg/m³

Minimum Frame Dimensions: 100mm Wide x 44mm Thick

Hanging Jambs Machined With 50mm Wide x 4mm Deep Scallop - See DP23771

All Frame Intumescent Seals Therm-A-Seal by Intumescent Seals Ltd

For More Information See Technical Datasheet

Description: **CF807 - FD30 Double Acting Double Door Assembly - Overview**

| | | | | | | |
|---|---|---|---|---|---|---|
| Drawn By: **P. Brash** | Approved: **Approved** | Revision: | Cert / FoA Ref: **CF807** | Date: **02/06/2025** | Drawing No: **DP23769** Rev **00** | doorpac<br>Unit 6, Ranskill Court, Sheffield, S9 5FZ |
| Size: **See Above** | Tolerance: **+/- 0.25mm** | | | Fire Rating: **FD30S** | | |
| Job No: **N/A** | © Doorpac Ltd | | | | | |